

## Gloss

A top quality oil based coating with excellent opacity. Dries to a high gloss finish.

Ideal for use on window frames, doors etc

- For interior and exterior use
- 2010 compliant (VOC Directive)
- Currently available in black and white with more colours to follow

## Undercoat

An oil based, high opacity undercoat with good flow characteristics.


Ideal for use as a foundation coating or when a colour change is desired.

- Ideal for use with Coo-Var Gloss or other compatible paints.
- For interior or exterior use

**Specialist  
Paints**

## TECHNICAL INFORMATION

PRODUCT	SUITABLE SURFACES	TIN OR PACK SIZE	COLOURS	COVERAGE	DRY TIME	FINISH
Matt Black	Wood, Metal, Masonry	250 ml, 500ml, 1 litre, 2.5 litre, 5 litre.	Black	9 sqm per litre	Touch dry: 2 mins Hard dry: 8 hours	Matt
Water Based Matt Black	Wood, Metal, Concrete	250 ml, 500ml, 1 litre, 2.5 litre, 5 litre.	Black	10 sqm per litre	Touch dry: 30 mins Hard dry: 2 hours	Matt
Ebony Black	Wood, Metal, Masonry	250 ml, 500ml, 1 litre, 2.5 litre.	Black	10 sqm per litre	Touch dry: 3 mins Hard dry: 8 hours	Low Sheen
Eggshell Finish White	Wood, Metal, Masonry	500ml, 1 litre, 2.5 litre.	White	13 sqm per litre	Touch dry: 4 hours Hard dry: 12 hours	Eggshell/ Semi-gloss
Solar Reflecting Aluminium	Stable felt, Wood, Brick, Concrete	5 litre, 25 litre.	Aluminium	4-6 sqm per litre	Touch dry: 3 hours Hard dry: 12 hours	High Refec- tive Sheen
Solar Reflecting White	Stable felt, Wood, Brick, Concrete	5 litre	White	8 sqm per litre	Touch dry: 45 mins Hard dry: 3 hours	Aggregated/ Granulated
Brick & Tile Paint (Oil Based)	Brick, Masonry, Stone	500ml, 1 litre, 2.5 litre, 5 litre.	Red	13 sqm per litre	Touch dry: 5 hours Hard dry: 24 hours	Matt or Gloss
Brick & Tile Paint (Water Based)	Brick, Plaster, Stone, Tile, Concrete, Render	500ml, 1 litre, 2.5 litre, 5 litre.	Red	13 sqm per litre	Touch dry: 30 mins Hard dry: 2 hours	Matt
Glass Shading	Glass	2.5 litre	White	20 sqm per litre (based on 2 parts paste 1 part water)	Touch dry: N/A Hard dry: 1-2 hrs	Matt
Heat Resistant Black Enamel	Wood, Metal	250 ml, 500ml, 1 litre.	Black	12 sqm per litre	Touch dry: 2 hours Hard dry: 16 hours	Satin
Radiator Enamel	Previously painted radiators	500ml, 1 litre, 2.5 litre.	White	7-8 sqm per litre	Touch dry: 1 hour Hard dry: 3 hours	Mid Gloss
Gold Paint	Suitably primed metal, Wood	250ml	Gold	10 sqm per litre	Touch dry: 30 mins Hard dry: 6 hours	Gloss
Finest Pale Goldsize	Wood, Metal	250ml	Clear	14 sqm per litre	Touch dry: 2 hours Hard dry: 16 hours	Gloss
Gloss	Wood, Metal, Glass Fibre	500ml, 1 litre, 2.5 litre, 5litre.	Black, White	13 sqm per litre	Touch dry: 6 hours Hard dry: 12 hours	Gloss
Undercoat	Wood, Metal, Glass Fibre	500ml, 1 litre, 2.5 litre, 5litre.	Grey, White	13 sqm per litre	Touch dry: 6 hours Hard dry: 12 hours	Low Sheen

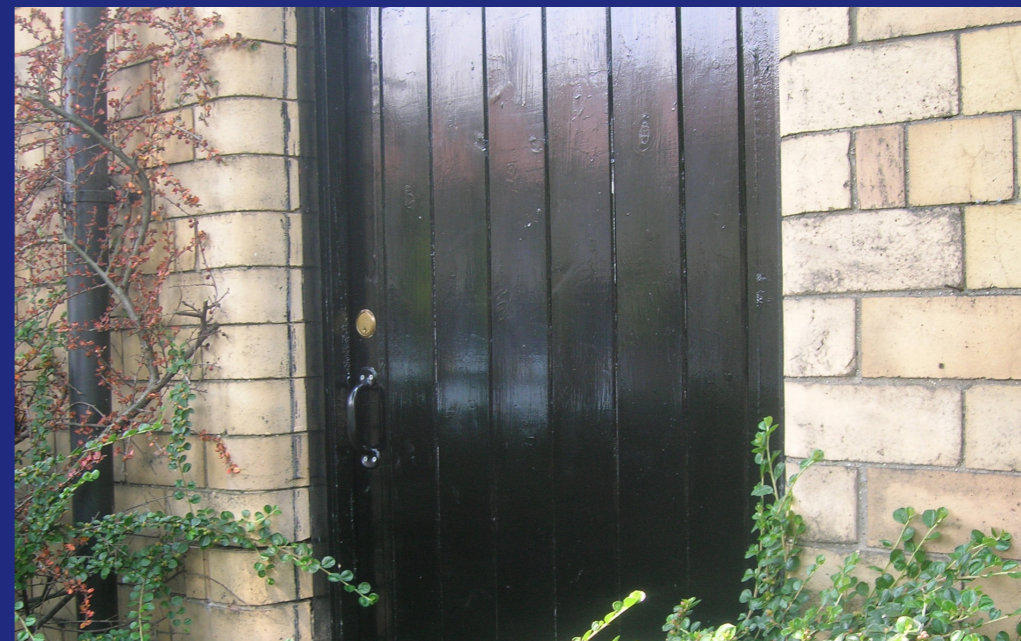

**Problem Solving Products  
for the 21st Century**

**coo-var®**  
COVERING OUR CUSTOMERS' NEEDS SINCE 1908

Ellenshaw Works, Lockwood Street, Hull, HU2 0HN, UK  
Tel: +44 (0)1482 328 053 Fax: +44 (0)1482 219 266  
Email: [info@coo-var.co.uk](mailto:info@coo-var.co.uk)  
[www.coo-var.co.uk](http://www.coo-var.co.uk)

### TECHNICAL & SPECIFICATION SERVICE

For full application details or technical and health & safety information, please read the relevant product data sheets which are available from our sales office and are downloadable from our website [www.coo-var.co.uk](http://www.coo-var.co.uk).

The Coo-Var Technical Services Department can provide a wide range of services, information and back-up to support our customers and end users.

To arrange for a site visit and specification, please contact us.



**coo-var®**  
PAINTS, PRIMERS AND SPECIALISED COATINGS

## Matt Black

Creates a subtle alternative to a black gloss paint. Ideal for use on wooden beams, wrought iron, chalkboards, in photographic dark rooms and anywhere else a non-reflective surface is required.

- Suitable for interior and exterior use



## Water Based Matt Black

A high opacity flat black acrylic. For the same uses as the oil based version.

## Ebony Black

Provides a classic low sheen finish to railings, lamps, wooden beams etc.

- Suitable for interior and exterior use



## Eggshell Finish White

A traditional oil based finish for wood, metal and masonry giving an eggshell/satin appearance.

- Suitable for interior and exterior use



Have a special job that requires a specialist paint? Look no further.

Coo-Var have over 100 years experience manufacturing specialist paints for most situations. We have both water based and oil based varieties, and with a paint suitable for most surfaces, you can be confident there is one for your job. These high quality products will help get the job done professionally and at an affordable price.

## Solar Reflecting Paint Aluminium

An oil based paint that provides a highly reflective metallic sheen. Designed to reflect and dissipate heat and light on roofs, therefore reducing heat build up.

- Can be used on stable felt, concrete, wood and brick



## Solar Reflecting Paint White

An acrylic, aggregated paint that gives a bright white finish. Designed to reflect and dissipate heat and light on roofs, therefore reducing heat build up.

- Can be used on stable felt, concrete, wood and brick
- NOTE: Not suitable for areas prone to standing water e.g. flat roofs.

This brochure takes you through Coo-Var's Specialist Paints products, where they are best to be used, how to use the products and their technical information (back page).

At any point in your decision or even after the coating is applied, you can call Coo-Var Technical Services to get advice and to answer any questions you may have – 01482 328053.

NOTE: Terebine Driers also available in this range. Swimming Pool Paint is available in our Floor, Sport and Line Marking Range.

## Brick & Tile Paint (Oil Based)

A general purpose, versatile paint for application to brick, stone, tiles or cement. Ideal for use on porches, outbuildings, garden walls etc.

- Available in Gloss and Matt finishes



## Brick & Tile Paint (Water Based)

A water based alternative to above. Gives a Matt finish. Fast Drying

## Extra Brilliant Aluminium Paint

Provides a durable silver-like finish to surfaces such as hot water pipes, radiators and metal car components. Resistant to heat up to 150 °C.

## Glass Shading

A water based paste for dilution. Is used to block out excess light and heat which helps to reduce interior temperature.

Ideal for use in glass roofs, windows, greenhouses etc.

- Can be diluted to your ideal opacity

**FAST and EFFECTIVE**

## Heat Resistant Black Enamel

For use in areas prone to heat. Will stand up to approx 250 °C indirect heat. Ideal for use on fire surrounds, radiators, hot pipes etc. Satin finish.

## Radiator Enamel

A high performance water based white radiator enamel. Designed for application to domestic hot water radiators. Dries to a Mid Gloss finish.

## Gold Paint

A versatile finishing metallic paint that gives a gloss finish. Ideal for use on metal railings, radiators, garden furniture, wheels, bicycles - the list goes on.

## Finest Pale Goldsize

A special clear preparation coating suitable for gilding work and as a mixing varnish. Used when applying gold leaf.

NOTE: Always read the instructions as well as health & safety information before applying any coating.